

Cable Head Assembly - Compatible with New Coated Electric Wireline Cable

Titan Division | Wireline Hardware




Hunting's Cone Type II Cable Head Assembly, known in the industry for its durability, is now compatible with coated electric wireline cables.

Cable Head Specifications

Part Number	3916-135-040-HA	3916-136-047-HA
Cable Head Type	Cone Type II	Cone Type II
Line Size	.288 Line, .040 Strand	.360 Line, .047 Strand
Rope Socket Cone	3916-328-040	3916-3359-047
Outside Diameter (in) [mm]	1-7/16 [37]	1-7/16 [37]
Maximum Temperature (°F) [°C]	400 [204]	400 [204]
Maximum Pressure (psi) [MPa]	20,000 [138]	20,000 [138]
Length (in) [mm]	12.4 [315]	12.4 [315]
Weight (lb) [kg]	3.6 [1.6]	3.6 [1.6]
Maximum Voltage (VDC)	600	600
Maximum Current (mA)	6,000	6,000
Maximum Tension (lbf) [kN]	42,000 [187]	42,000 [187]
Thread	1-3/16" -12 GO Pin	1-3/16" -12 GO Pin

Easy Assembly and Redress

Hunting's Cone Type II Cable Head Assembly is part of a complete system.

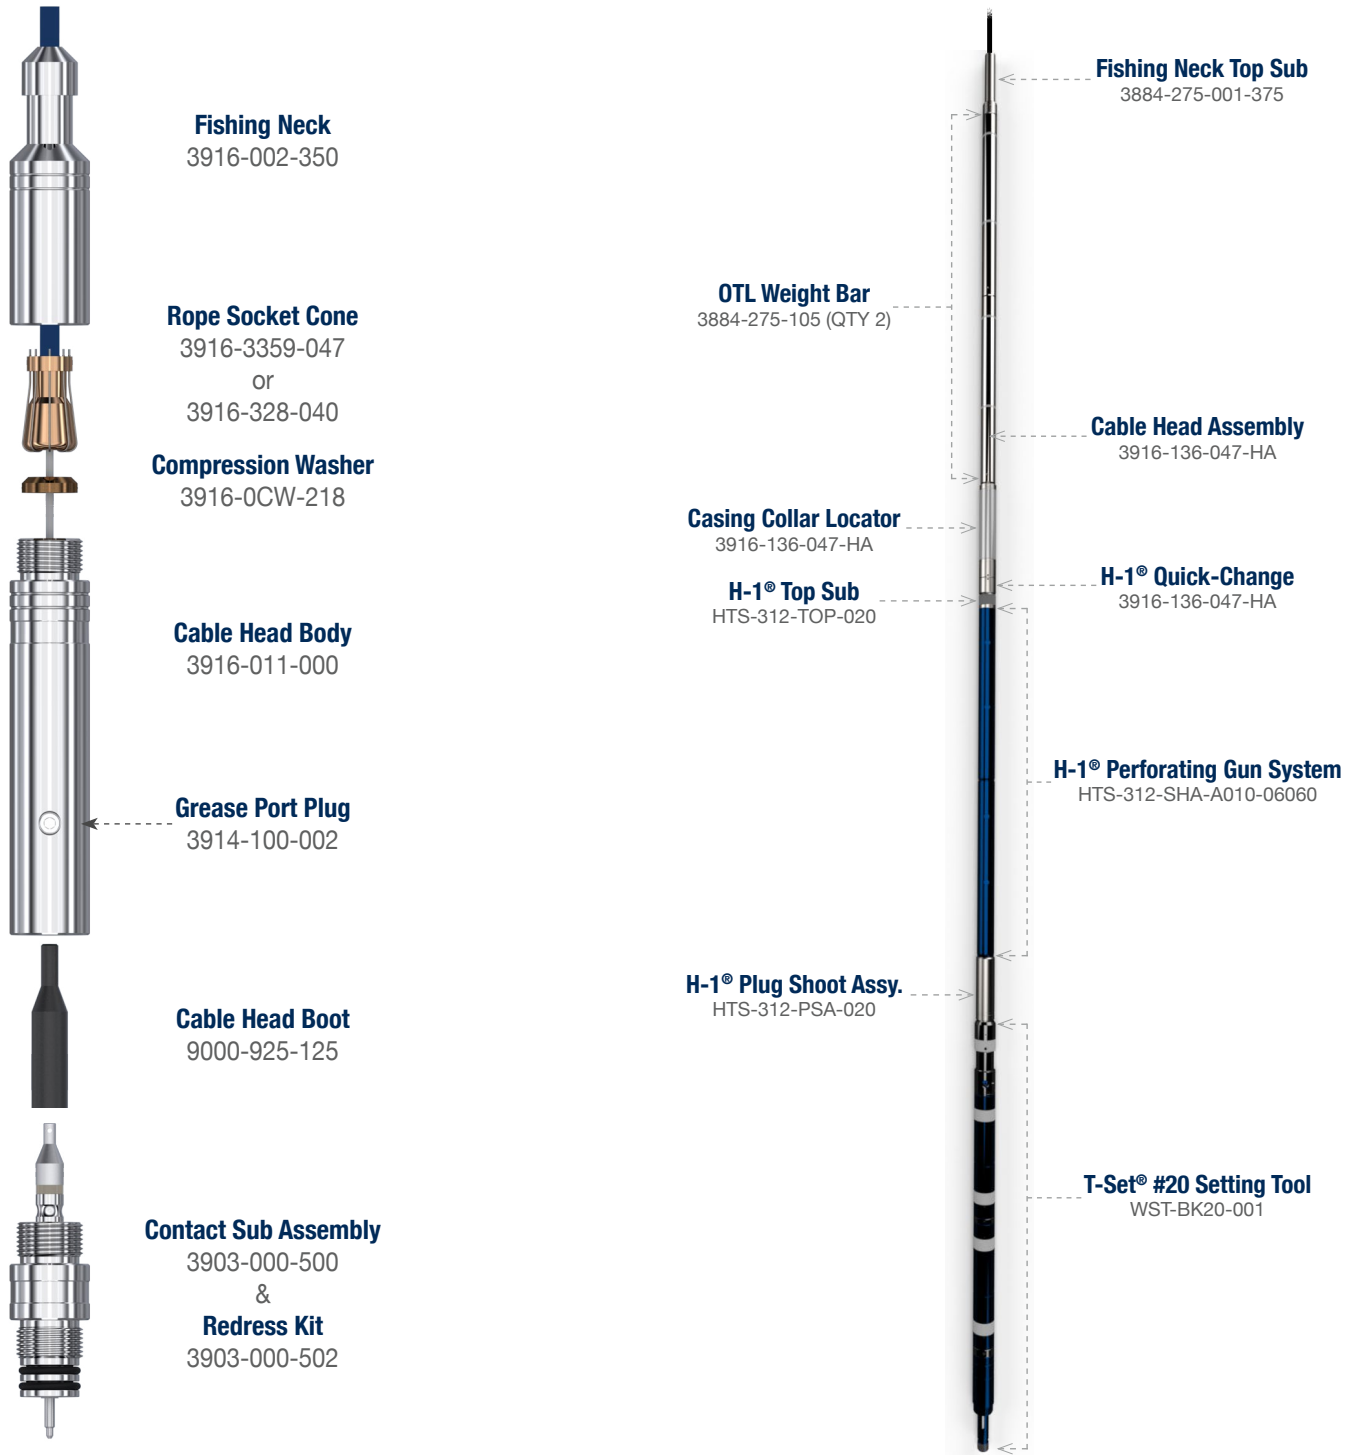

Contact Information

Sales
sales.titan@hunting-intl.com

Support
support.titan@hunting-intl.com

Perforating
Pampa, TX USA (806) 665-3781
Calgary, AB CAN (403) 543-4477

Instruments
Pampa, TX USA (806) 665-3781
Wichita Falls, TX USA (940) 691-1005
Houston, TX USA (713) 463-5881

Energetics
Milford, TX USA (972) 493-2580

Distribution
Hunting's distribution centers are strategically placed globally.
For more information, visit us at: www.hunting-intl.com/titan