



Mud Motor Specification Sheet

3.50" 7/8 4.3 (1.85) 3.50" OD, 7/8 Lobe, 4.3 Stages

Physical Data

Bit size range	Bit box connection	Top sub connection	Maximum weight on bit	Maximum overpull
4 1/2" - 4 3/4"	2 7/8" Reg	2 7/8" TSHD	8,800 lbs	115,000 lbs

Recommended Drilling Fluid Properties


Sand content (Maximum)	Low gravity solids (LGS) (Maximum)	Total solids (Maximum)	pH	Aniline point (OBM) (Minimum)	Chlorides (Maximum)	Lost circulation material (LCM)
Trace	4%	8%	8 to 10	165° F	150,000 ppm	Thoroughly mix before pumping downhole

Performance Specifications

	Rev / Gal	Flow range	Speed range	Max operating diff pressure	Torque at max operating diff pressure	Stall diff pressure	Torque at stall pressure	Max temp for max operating diff pressure
NBR	1.85	55 - 110 GPM	102 - 204 RPM	645 psi	922 ft. lbs	968 psi	1,384 ft. lbs	150° F*
HR	1.85	55 - 110 GPM	102 - 204 RPM	968 psi	1,384 ft. lbs	1,451 psi	2,075 ft. lbs	150° F*

* For temperatures exceeding 150° F, please refer to Hunting's derating of differential pressure due to downhole temperature.

- HR Elastomer •
- NBR Elastomer •
- Torque •

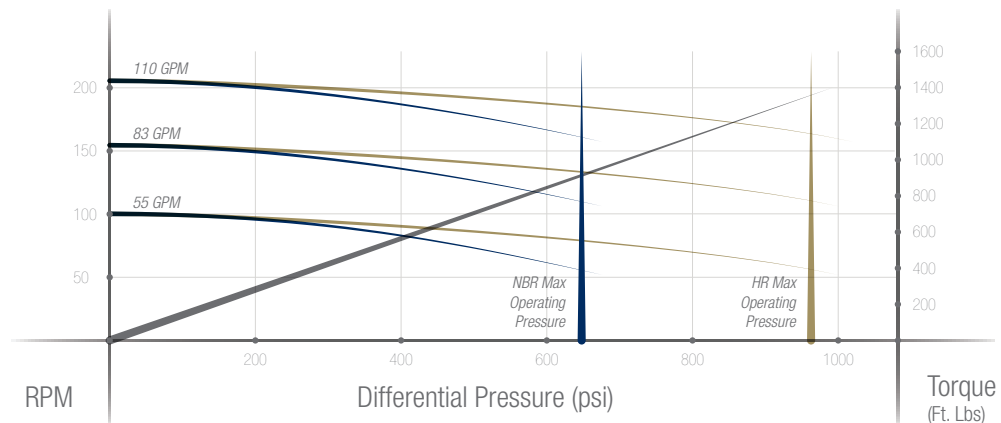

Dimensional Data

Continuous Maximum Rotary RPM

	Bit to Bend	Bit to Stabilizer	Overall Length	1.25° Bend	1.50° Bend	1.83° Bend	2.12° Bend	2.38° Bend
Straight	NA	NA	16 ft. 5 in	Straight Configuration: 80 RPM				
Fixed Bend	41"	NA	16 ft. 5 in	60	50	40	30	20
Adjustable	41"	NA	16 ft. 5 in	60	40	Not Recommended	Not Recommended	Not Recommended

Predicted Build Rates Degrees / 100 Ft.

Hole Size	Configuration	1.25° Bend	1.50° Bend	1.83° Bend	2.12° Bend	2.38° Bend
4 1/2" Hole	Slick	8.84	11.89	15.91	19.44	22.61
	Stabilized					
4 3/4" Hole	Slick	6.72	9.76	13.78	17.31	20.48
	Stabilized					